


Submittal

TAG:

Multi-Position Cased Coils

Cooling and Heat Pump Compatible

Cooling capacity: 30–60 kBTU/h

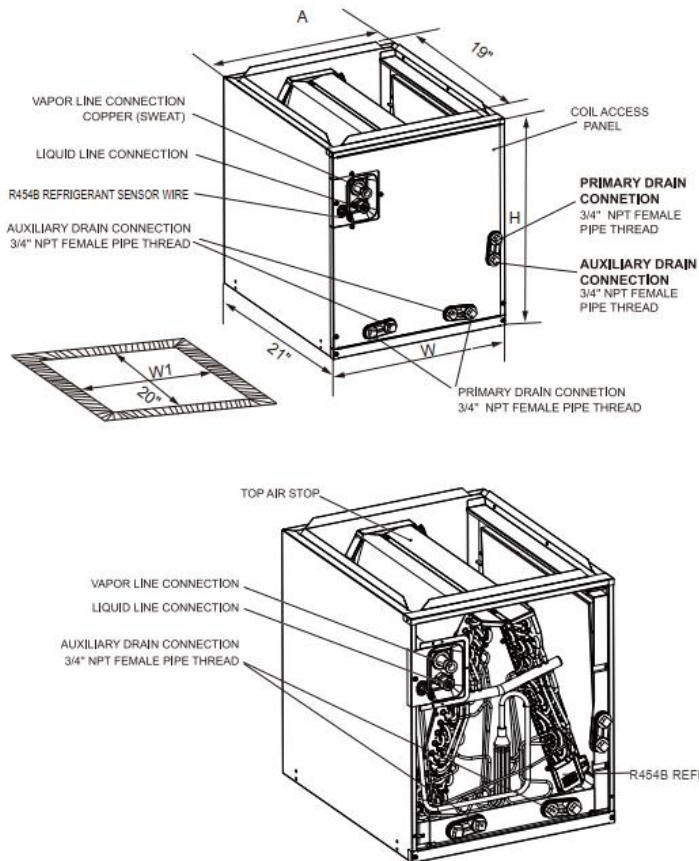

MODELS	Unit Dimensions IN. [mm]					WEIGHT (LBS. [kg])
	UNIT HEIGHT "H"	UNIT WIDTH "W"	SUPPLY DUCT "A"	"W1"	LIQUID LINE/ VAPOR LINE	
TCCM4248BAOH	30 [762]	17-1/2 [445]	16 [407]	16-1/2 [419]	3/8 / 3/4	73 [33]

Specifications

	TCCM4248BAOH
INSTALLATION	Multiple position
AIR OUTLET (W × H) (in.)	16 × 19
NOMINAL RATING	
Max. Cooling (BTU/h)	42,000/48,000
EVAPORATOR COIL	
Type	Tube & Fin
Tube Material	Aluminum
Tube Size (in.)	3/8
REFRIGERANT CONNECTION SIZE	
Liquid Line Size (O.D.) (in.)	3/8
Suction Line Size (O.D.) (in.)	3/4
Dimension	
Net dimensions (W × H × D) (in.)	21 × 17-1/2 × 30
Packed dimensions (W × H × D) (in.)	24-15/16 × 20-5/8 × 32-5/16
WEIGHT	
Net weight (lbs.)	73
Shipping weight (lbs.)	79

Features

- Safe, low-GWP R454B refrigerant with leak alarm function.
- High efficiency and energy saving, AHRI energy efficiency certification.
- Multi-position installation accommodates a variety of installation scenarios.
- Broad cooling range from 55°F to 120 °F, powered by extra-wide Operation Range Control Technology.
- Stable heating down to 5 °F through Intelligent Frost Control.
- Optimized blower control ensures rapid start and stable operation.
- Outdoor DC motor with 10 taps, adjusted automatically by ambient temperature.
- 15.2 AC Series provides up to 15.2 SEER2 cooling efficiency when matched with 15.2 AC outdoor units.
- 15.2 HP Series provides up to 15.2 SEER2 cooling efficiency and 7.8 HSPF2 heating efficiency when matched with 15.2 AC outdoor units.
- 13.4 AC Series provides up to 14.3 SEER2 cooling efficiency when matched with 13.4 AC outdoor units.
- Multiple floating-operation protections for enhanced system stability and security.
- UL 2-40 60335 Certificated

