R454b
Refrigerant

SUBMITTAL DATA SHEET

Series Name: Regular Heat AHU Series
Model Number: MAWHE-H36B-2A/MO1BE-H36B-2A

Midea

Air Handler Heat Pump System	
Location:	Approval:
Engineer:	Date:
Submitted to:	Construction:
Submitted by:	Unit #:
Reference:	Drawing #:



INDOOR SPECIFICATION		
ESP(inWG)		0~0.8
Indoor Air Flow (Turbo/H/M/L/Si) (CFM)		1189 / 1083 / 971 / 865 / 865
Indoor Noise Level (Turbo/H/M/L/Si) (dBA)		52 / 52 / 48.5 / 36.5 / 36.5
Dimension (W×D×H)	**inch**	22 x 19 x 40
	mm	559 × 483 × 1017
Package (W×D×H)	**inch**	24-5/8 x 22-7/8 x 47
	mm	625 × 580 × 1193
Net/Gross Weight	**lbs**	110 / 131
	kg	49.7 / 59.3

OUTDOOR SPECIFICATION		
Compressor Type		ROTARY
Compressor Model		KTF310D43UMT
Refrigerant		R454B
Refrigerant Oil Charge(mL)		1000
Refrigerant Oil		VG74
Outdoor Air Flow (Max) (CFM)		2,413
Outdoor Noise Level (dBA)		62
Dimension (W×D×H)	**inch**	37-1/4 x 16-1/8 x 31-7/8
	mm	946 × 410 × 810
Package (W×D×H)	**inch**	42-7/8 x 19-5/8 x 34-7/8
	mm	1090 × 500 × 885
Net/Gross Weight	**lbs**	153 /164
	kg	69.5 / 74.2

EFFICIENCY			
Cooling		**Heating**	
SEER2	16.7	**HSPF2-4**	9.3
EER2	10.2	**COP**	3.30

PERFORMANCE of Cooling	
Cooling (Btu/hr)	
Rated Capacity	36,000
Min/Max Capacity	11,800~39,000
Moisture Removal(L/h)	3.37
Standard Operating Range(°F/°C)	-22~122 (-25～50)
Rated Cooling Conditions:	Indoor: 80°F DB/67°F WB Outdoor: 95°F DB/75°F WB


PERFORMANCE of Heating	
Heating (Btu/hr)	
1. @ 47°F Rated	37,000

ELECTRICAL	
Indoor Power Supply	115/208/230V,60Hz,1Ph
Indoor MCA 115V/(208/230V)	6.5
Indoor MOP	15.0
Outdoor Power Supply	208/230V,60Hz,1Ph
Outdoor MCA	24.0
Outdoor MOP	30.0
Communication Wiring	AWG 20-2
Compressor RLA	17.5
Outdoor Fan Motor RLA	1.5
Outdoor Fan Motor W	/
Indoor Fan Motor RLA	5
Indoor Fan Motor W	375
System Power Input @ Cooling (W)	3,529 (760 ~ 4,090)
System Power Input @ Heating (W)	3,189 (490 ~3,710)
MCA: Min. circuit amps (A)	**MOCP: Max. over current protection (A)**
RLA: Rated load amps (A)	**W: Fan motor rated output (W)**

2. @ 47°F Min/Max Capacity	6,900~41,000
3. @ 17°F Rated	24,800
4. @ 5°F Rated: Capacity / COP	29,200/1.99
5. @ 5°F Max: Capacity	29,200
Standard Operating Range(°F/°C)	-22~75 (-25～24)
1. Rated Heating Conditions:	Indoor: 70°F DB/60°F WB
	Outdoor: 47°F DB/43°F WB
2. Rated Heating Conditions:	Indoor: 70°F DB/60°F WB
	Outdoor: 17°F DB/15°F WB
3. Heating Conditions, Compressor	Indoor: 70°F DB/60°F WB
Operating at Max. Frequency	Outdoor: 5°F DB/5°F WB

PIPING	
Throttle type(Indoor)	EXV
Throttle type(Outdoor)	EXV
Liquid Size	3/8'' (9.52mm)
Gas Size	3/4'' (19mm)
Max. Piping Length(ft/m)	246 (75)
Max. Height Difference(ft/m)	98 (30)
Max. Pre-charged Length(ft/m)	25 (7.5)
Refrigerant Pre-charged Amount(oz/kg)	116 (3.3)
dditional Charge of Refrigerant((oz/ft)/(g/m	0.7 (65)
Connection Method	Flared


Indoor Unit Dimension

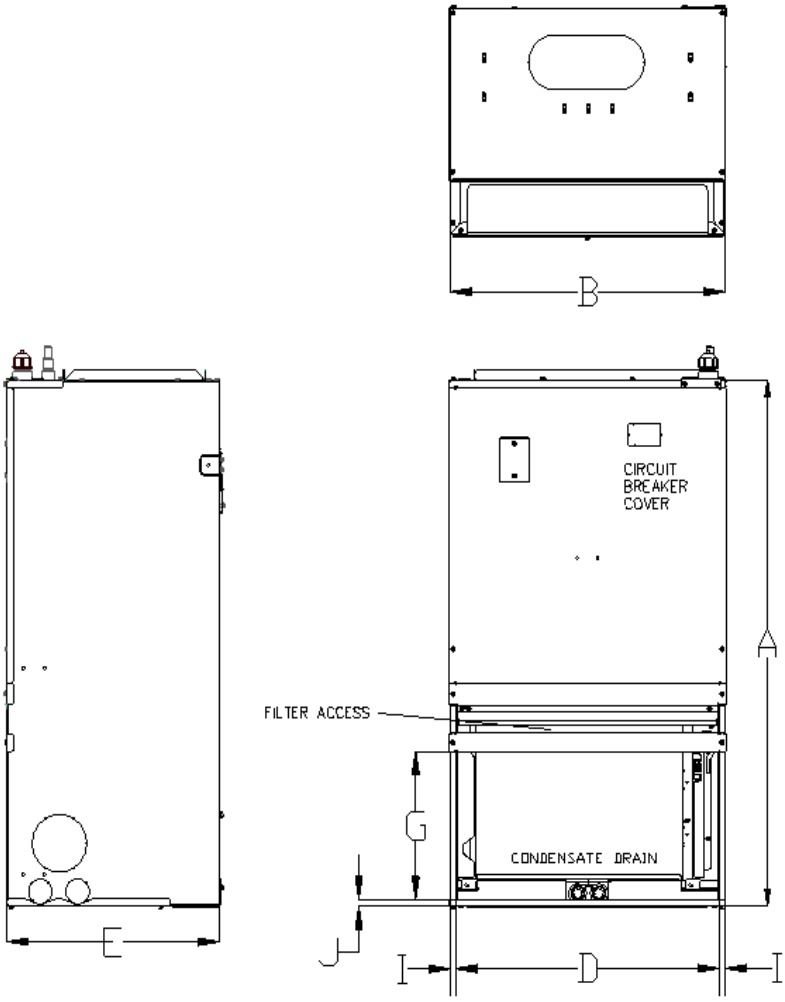


Dimensions \ Model(Btu/h)		18K/24K		30K/36K	
		inch	mm	inch	mm
A	Model Height	36-1/2	928	40	1017
B	Model Width	20-1/4	515	22	559
C	Supply Air Opening Width	17-13/32	442	18-27/32	478.6
D	Return Air Opening Width	19-7/16	493.8	21-5/32	537.8
E	Model Depth	15-3/4	399	19	483
F	Supply Air Opening Depth	10-7/16	265.2	9-9/32	235.4
G	Return Air Opening Depth	10-9/32	261	13-2/32	332.5
H	Supply Air Opening Clearance	1-5/32	29.1	1-5/8	41
I	Return Air Opening Side Clearance	13/32	10.6	13/32	10.6
J	Return Air Opening Front Clearance	15/32	12	5/8	16


Outdoor Unit Dimension

Unit:inch(mm)

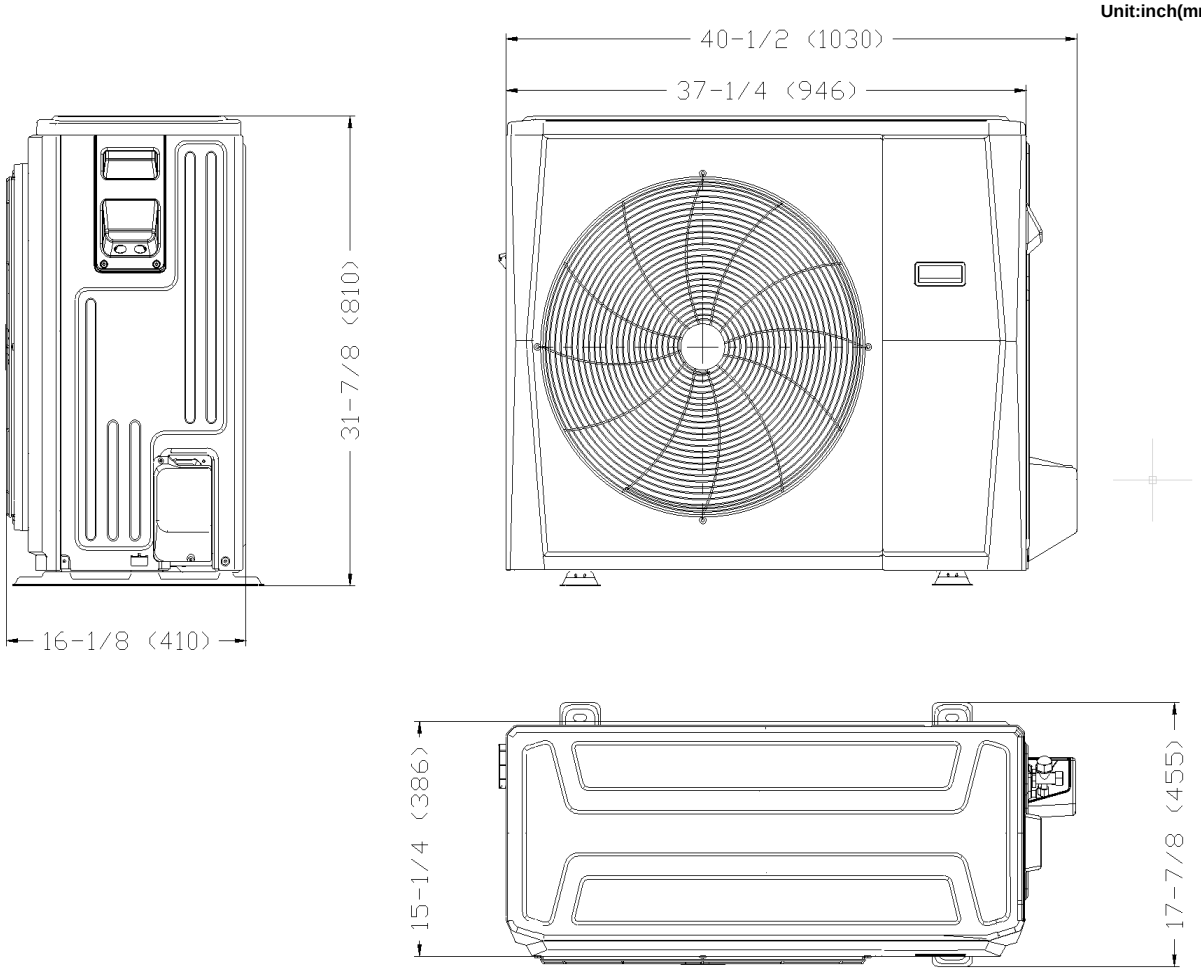


Installation Instruction For Outdoor Unit

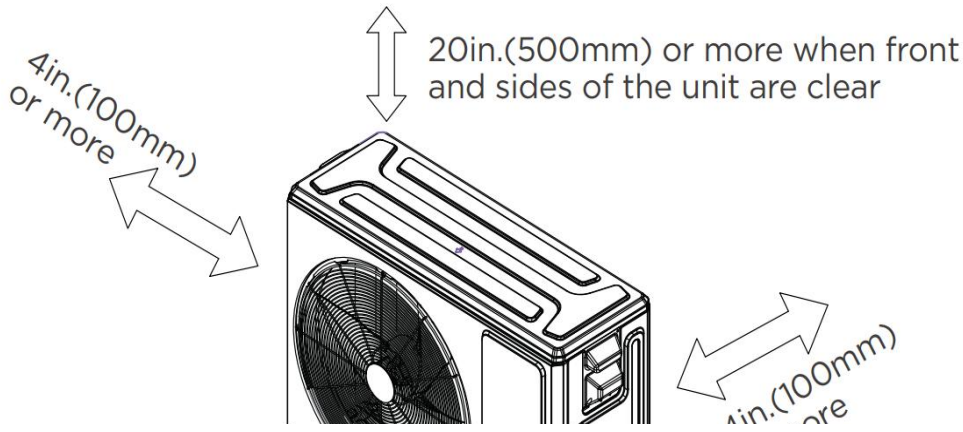

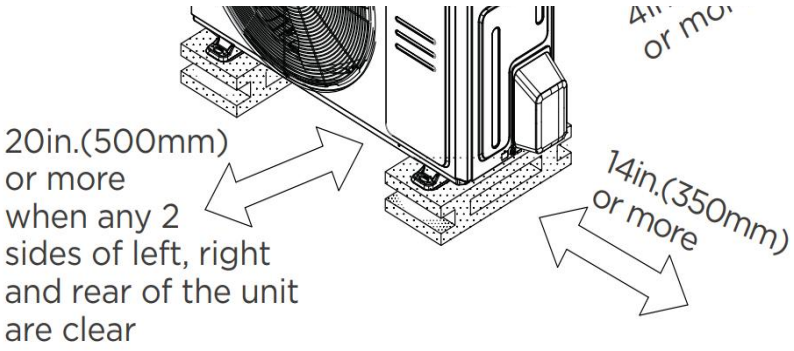

Fan Performance For Indoor Unit

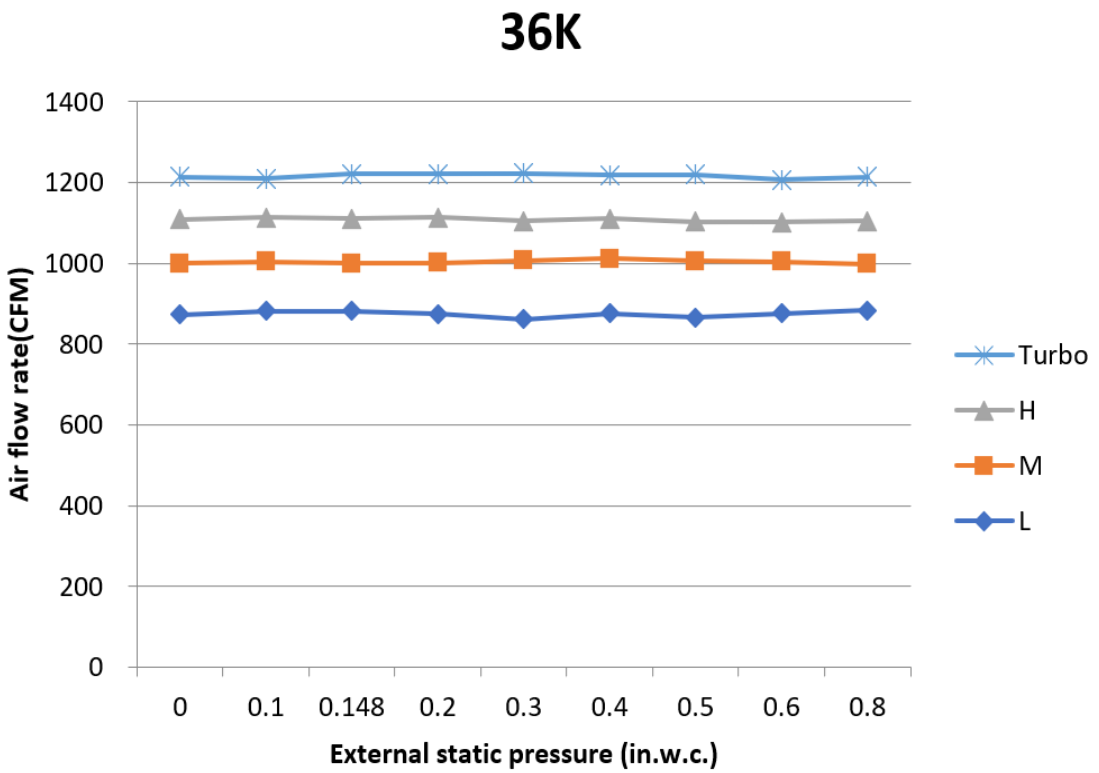

Features

- Multi-position of return air: front(factory standard) or bottom
- Aluminum Coil
- Constantly Air Flow system up to 0.80 In.W.G

- Optional Auxiliary heat kit up to 10kW
- Easy Maintenance
- Multiple control options available:
  - Two way communication wired controller:120N(X6)
  - Two way communication wired controller with built-in WiFi:120N(X6W)
  - Wireless remote controller
  - Third-Party 24V Thermostat
- High efficiency up to 18.5 SEER2, 11.5 EER2, 9.4 HSPF2
- Chassis heater and crankcase heater equipped as standard